



SITELIGHT 48W SMD LED WITH 2 X 13A SOCKETS 230V

MODEL NO: **LED48230**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.




Refer to instruction manual

1. SAFETY

1.1. Electrical Safety

- WARNING!** It is the user's responsibility to check the following:
Check all electrical equipment and appliances to ensure that they are safe before using. Inspect power supply leads, plugs and all electrical connections for wear and damage. Sealey recommend that an RCD (Residual Current Device) is used with all electrical products. You may obtain an RCD by contacting your local Sealey stockist.
If the light is used in the course of business duties, it must be maintained in a safe condition and routinely PAT (Portable Appliance Test) tested.
- ✓ Electrical safety information, it is important that the following information is read and understood.
- ✓ Ensure that the insulation on all cables and on the appliance is safe before connecting it to the power supply.
- ✓ regularly inspect power supply cables and plugs for wear or damage and check all connections to ensure that they are secure.
- ✓ Ensure that the voltage rating on the appliance suits the power supply to be used and that the plug is fitted with the correct fuse.
- ✗ **DO NOT** pull or carry the appliance by the power cable.
- ✗ **DO NOT** pull the plug from the socket by the cable.
- ✗ **DO NOT** use worn or damaged cables, plugs or connectors.
- ✓ This product is fitted with a BS1363/A 13 Amp 3 pin plug. If the cable or plug is damaged during use, switch the electricity supply and remove from use. Repairs must be carried out by a qualified electrician.
Replace a damaged plug with a BS1363/A 13 Amp 3 pin plug.
 - a) Connect the GREEN/YELLOW earth wire to the earth terminal 'E'.
 - b) Connect the BROWN live wire to the live terminal 'L'.
 - c) Connect the BLUE neutral wire to the neutral terminal 'N'.
- ✓ Ensure that the total load on the sockets **DOES NOT** exceed 13A (this should include the load of the light itself).
- ✓ Ensure that the cable outer sheath extends inside the cable restraint and that the restraint is tight.
Sealey recommend that repairs are carried out by a qualified electrician.

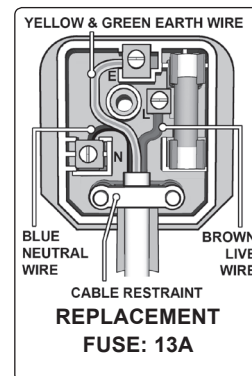

1.2. General Safety

- WARNING!** Turn off the mains power supply before servicing or performing any maintenance.
- ✓ Ensure the light is installed correctly in accordance with these instructions.
- ✓ If you use an extension lead **the cable must be fully unwound from the drum.**
- ▲ **DANGER! DO NOT** direct the light into a person's eyes. All models have a very intense light output which, if incorrectly used, could cause eye damage.
- ✗ **DO NOT** use the light near flammable, combustible or explosive liquids, solids, gases or equipment.
- ✓ Maintain the light in good condition. Repairs must only be undertaken by a qualified electrician (use an authorised service agent).
- ✓ Locate the light in an adequate area for its function, keep area clean and tidy and free from unrelated materials.
- ✓ When not in use, switch off the light and disconnect from the power supply. Ensure that the unit is cool and dry and then store in a safe, dry, childproof area.

2. INTRODUCTION

Heavy duty robust design with integral carry handle and 180° stand for positioning of light and substantial stability. SMD LED technology sitelight for ultra bright illumination. Features 2 x 13A power sockets on reverse of light allowing other power tools to be used. Simple on/off weatherproof switch on reverse of light. Cable strap to keep cable tidy when not in use. Cable gland fitted to entry of the light to provide good protection of the cable. Supplied with BS approved 13A plug.

3. SPECIFICATION

Model No:.....	LED48230
Led Quantity:.....	120 SMD
Lumen Output:.....	5000lm
Supply:.....	230V
Power:.....	48W
IP Rating:.....	IP54
Weight:.....	2.7kg

4. OPERATION

- 4.1. The angle of the stand may be adjusted by pulling it outwards and clicking into the required position.
- 4.2. The light is operated by plugging into the mains supply and switching on or off by means of the on/off switch situated at the back of the casing.
- 4.3. To use the fitted 13A sockets, lift the spring loaded protective flap and insert the plug. The sockets remain live as long as the light is connected to the electric supply.

5. CLEANING

- * **DO NOT** use abrasive or solvent cleaners, clean with a damp cloth.



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk