



INSTRUCTIONS FOR:
HIGH VOLTAGE RESCUE POLE
 MODEL NO: **HRP45**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions and maintained properly, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to Instruction Manual

1. SAFETY

Ensure that all members of staff are trained in the use of the rescue pole.

▲ **DANGER:** When being used in a rescue situation, **DO NOT** hold the pole forward of the rubber guard (fig.1)

2. INTRODUCTION

High voltage rescue pole suitable for use up to 45kV AC in dry conditions, in accordance with EN 50508. Supplied with wall mounting brackets and instructions for use. Suitable for hybrid and electric vehicle applications.

3. SPECIFICATION

Model No: **HRP45**
 Diameter: Ø28mm
 Length: 1.65mtr
 Material: Fibreglass

4. INSTALLATION


- 4.1. Select a conspicuous location close to the relevant work area.
 - 4.1.1. The area chosen should be free from the risk of chemical contamination, condensation and within a temperature range of -10°C and +35°C
- 4.2. Using suitable wall plugs, fasten the holder (fig.1) at a height which will allow the rescue pole to be grasped below the rubber guard.
 - 4.2.1. Fasten the clip (fig.1) to the wall at a height which will ensure that the rescue pole sits securely with its heel in the holder and the shaft pressed into the clip.

5. USE

- 5.1. Hold the PVC handle firmly, **DO NOT** hold the rescue pole forward of the rubber guard, place the rescue hook around the casualty and pull them away from the electrical supply.
- 5.2. Ensure the casualty is completely isolated from the electrical supply before administering first aid.

6. MAINTENANCE

The Rescue Pole must be kept clean; if necessary it is recommended cleaning it with silicone..

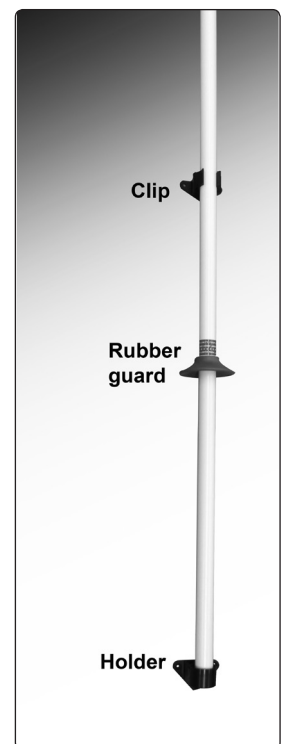

ENVIRONMENT PROTECTION



Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk