



INSTRUCTIONS FOR  
**TIE DOWN - MOTORCYCLE HANDLEBAR**  
 MODEL NO: **TDMCHB**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

**IMPORTANT:** PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instructions

### 1. SAFETY

- ✓ When selecting web lashings (tie downs) consideration must be given to the required lashing capacity, taking into account the mode of use and the nature of the load to be secured.
- ✓ Tie downs must be strong enough and of the correct length for the mode of use.
- ✓ Take care that the load is stable when the tie down is released.
- ✓ Avoid exposure of the tie down to chemicals.
- \* **DO NOT** use if tie down is damaged. A visual inspection before use is recommended.
- ✓ Avoid sharp edges. Protect tie downs by using sleeves or corner protectors.
- \* **DO NOT** overload.
- \* **DO NOT** use if knotted.

### 2. INTRODUCTION

Manufactured from polyester webbing with stitched reinforcement around loops. Suitable for workshop use, or for securing motorcycle to flat-bed or trailer. Simple cam buckle fastener tensions the webbing to provide superior load restraint.

### 3. SPECIFICATION

Model No.....	TDMCHB
Maximum Tension .....	350Kg
Load Test .....	700Kg
Webbing Width.....	35mm
Max. Handlebar Restraint Width .....	750mm

### 4. OPERATION

- 4.1. Place strap centrally across handle bars.
- 4.2. Position red section of strap over handle bar grip fig.2.
- 4.3. Place through loop fig.3. Pull strap tight.
- 4.4. Pass end of strap through second loop fig.4.
- 4.5. Let end of strap hang, ready for attaching to fixing point. fig.5.
- 4.6. Repeat for second handle bar grip.
- 4.7. Tighten strap between handle grips fig.6.

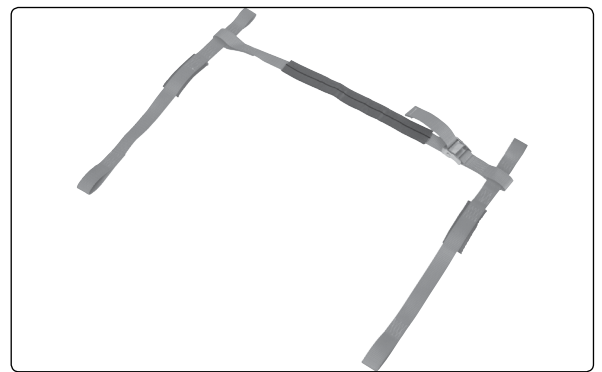


fig.1




fig.2



fig.3



fig.4



fig.5

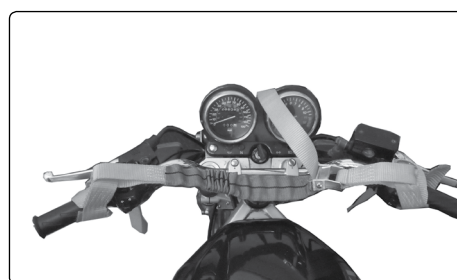


fig.6

## 5. STORAGE

- 5.1. Always store in a dry place.

## 6. MAINTENANCE

- 6.1. Use a light duty oil on the gears and slides to keep the ratchet operating properly.



### ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

**Note:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

**Important:** No Liability is accepted for incorrect use of this product.

**Warranty:** Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk