


Short Machine Taps ISO 529, HSS

BA-Thread, BS 93

Product Group	10	10	10	10	10	10
List-No.	60500	60500	60500	60500	60510	60520
Type	Set	STF Taper	STF Second	STF Bottom	SpPt	SpFl
Type of hole		TH	TH	TH / BH	TH	BH
Length of chamfer lead (Thread)		8 - 10	4 - 5	1,5 - 2,5	4 - 5	1,5 - 2,5
Tolerance	CL2	CL2	CL2	CL2	CL2	CL2
Surface	P0	P0	P0	P0	PI	P0

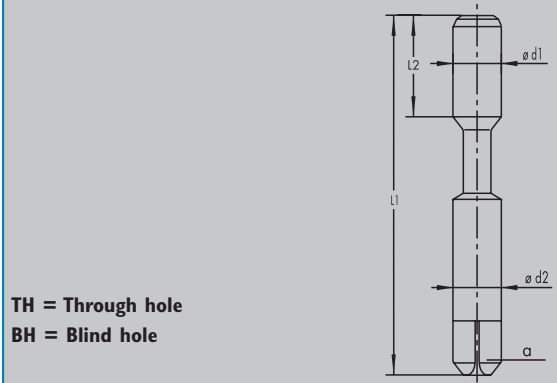

Size	TPI	l1 mm	l2max mm	d2 mm	a mm	Availability	Availability	Availability	Availability	Availability	Availability
14	110,4	38,5	5,5	2,5	2,0	*	*	*	•		
12	90,9	40	7	2,5	2,0	*	*	*	•		
10	72,6	41	8	2,5	2,0	*	*	*	•	•	
9	65,1	41	8	2,5	2,0	*	*	*	•	•	
8	59,1	44,5	9,5	2,8	2,24	•	•	•	•	•	
7	52,9	44,5	9,5	2,8	2,24	*	*	*	•	•	
6	47,9	44,5	9,5	2,8	2,24	•	•	•	•	•	•
5	43,0	48	16	3,15	2,5	•	•	•	•	•	•
4	38,5	50	19	3,55	2,8	•	•	•	•	•	•
3	34,8	53	13	4,5	3,55	*	*	*	•	•	
2	31,4	58	16	5,0	4,0	•	•	•	•	•	•
1	28,2	62	17	5,6	4,5	*	*	*	•	•	
0	25,4	66	19	6,3	5,0	•	•	•	•	•	•

* - available on request

P0-Bright • P1-Steam tempered • P2-Bronze • P3-Moc • P4-Nitrided • P5-TiN • P6-TiCN • P7-HY • P8-TiAlN • P9-TiB

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12