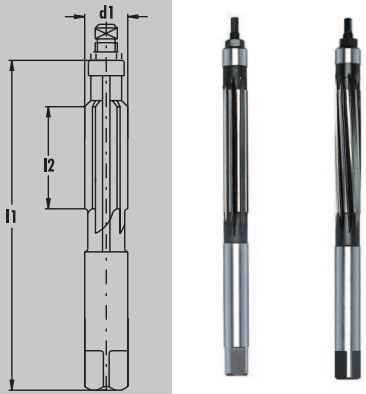
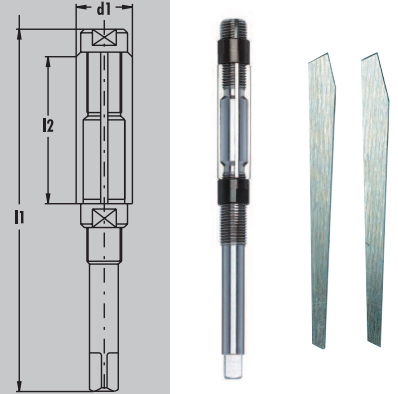


1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12

### Adjustable Hand Reamers with straight shank HSS, DIN 859

Product Group	08	08		
	straight	spiral		
List-No.	75060	75070		
Material	HSS	HSS		
Surface	P0	P0		
 <p> <math>\varnothing</math> 6-10 mm 0,10 mm adjustable  <math>\varnothing</math> 11-15 mm 0,15 mm adjustable  <math>\varnothing</math> 16-22 mm 0,20 mm adjustable  <math>\varnothing</math> 23-30 mm 0,30 mm adjustable  <math>\varnothing</math> 31-45 mm 0,40 mm adjustable         </p>				
d	l1	l2	Availability	Availability
mm	mm	mm		
4,00	76	38	•	
5,00	87	44	•	
6,00	93	47	•	•
7,00	107	54	•	•
8,00	115	58	•	•
9,00	124	62	•	•
10,00	133	66	•	•
11,00	142	71	•	•
12,00	152	76	•	•
13,00	152	76	•	•
14,00	163	81	•	•
15,00	163	81	•	•
16,00	175	87	•	•
17,00	175	87	•	•
18,00	188	93	•	•
19,00	188	93	•	•
20,00	201	100	•	•
21,00	201	100	•	•
22,00	201	107	•	•
23,00	201	107	•	•
24,00	231	115	•	•
25,00	231	115	•	•
26,00	231	125	•	•
27,00	247	124	•	•
28,00	247	124	•	•
29,00	247	124	•	•
30,00	247	124	•	•
31,00	265	133	•	•
32,00	265	133	•	•
33,00	265	133	•	•
34,00	284	142	•	•
35,00	284	142	•	•
36,00	284	142	•	•
37,00	284	142	•	•
38,00	305	152	•	•
39,00	305	152	•	•
40,00	305	152	•	•

### Hand Reamers with straight shank, Special Steel and Set of Blades, Factory Standard

Product Group	08	08		
	Reamer	Set of Blades		
List-No.	75090	75290		
Material	Special Steel	Special Steel		
Surface	P0	P0		
				
Range	l1	l2	Availability	Availability
	mm	mm		
8,0 - 9,0	111	32	•	•
9,0 - 10,0	115	32	•	•
10,0 - 11,0	120	35	•	•
11,0 - 12,0	125	35	•	•
12,0 - 13,5	130	42	•	•
13,5 - 15,5	145	50	•	•
15,5 - 18,0	165	60	•	•
18,0 - 21,0	180	65	•	•
21,0 - 24,0	190	70	•	•
24,0 - 27,5	205	75	•	•
27,5 - 31,5	225	80	•	•
31,5 - 37,0	240	90	•	•
37,0 - 45,0	285	100	•	•
45,0 - 55,0	320	109	•	•
55,0 - 65,0	350	120	•	•

P0-Bright • P1-Steam tempered • P2-Bronze • P3-Moc • P4-Nitrided lands • P5-TiN • P6-TiCN • P7-HY • P8-TiAlN • P9-TiB